

ASSEMBLY INSTRUCTIONS FOR THE FLEX-WOOD® SYSTEM.

The kit consists of two slats with a length of 109 cm and a width of 4 cm. They are made entirely of metal, galvanised and powder-coated with anti-corrosion paint in white, graphite, brown and black.



The slat is divided into two sections. Each section consisting of six boards is operated with a convenient handle with a latch function. The slats are fastened to the poles with screws of the appropriate colour and then the boards are inserted into the slots. There are additionally two holes in the slots to protect the boards from falling out (optional).



We recommend milled boards for the “FLEX-WOOD”, with the following dimensions:


thickness: 19 mm

Width: 93-95mm

Length: 500 to 1200 mm

Slat joining.

To obtain a higher structure, the slats can be joined by cutting 11 mm long pieces (the lower one in the upper part, the upper one in the lower part – see the illustrated instructions). The cut slats are to be moved together. In addition, each slat can be shortened by one segment, which does not affect the functioning of the entire mechanism and allows you to optimally adjust the height.

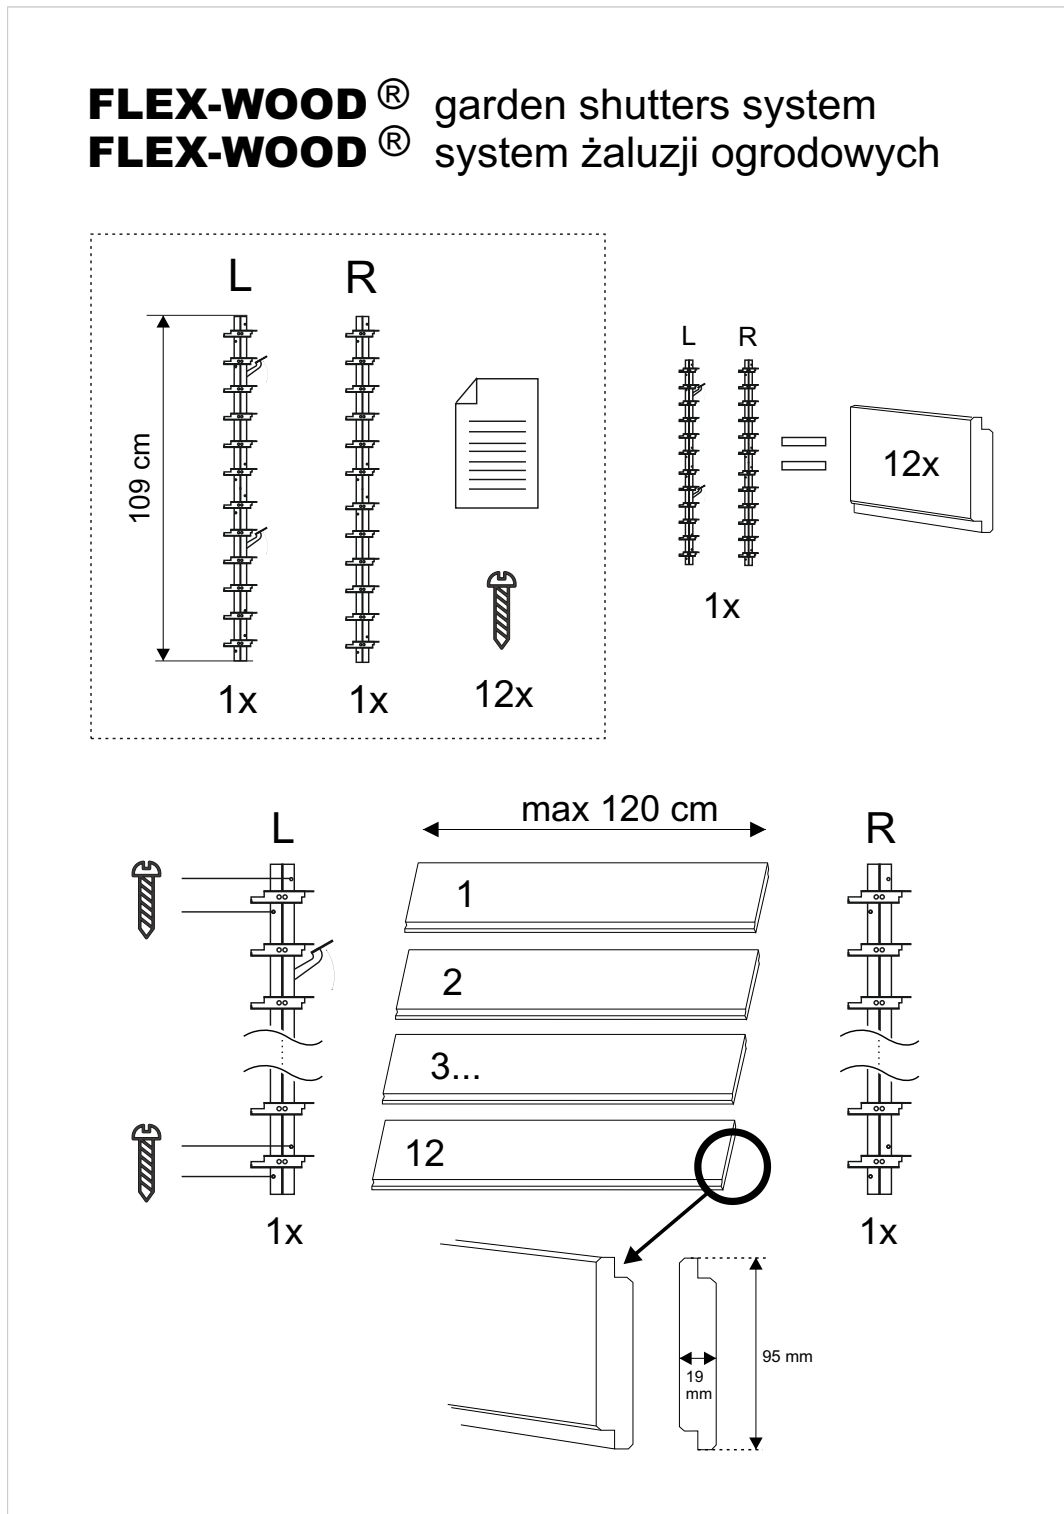

FLEX-WOOD® garden shutters system
FLEX-WOOD® system żaluzji ogrodowych

Combining shutters - cut both racks by 11 mm.
Łączenie żaluzji - skróć obie listwy o 11 mm.

